


PARELO LOAD BANKS



PASSIVE RESISTIVE LOAD BANK SERIES

RACK MOUNT **100** TO **3,200** WATT
LOAD BANK MODULES

UP TO 8 LOADS IN SERIES PROVIDES UP TO
25,600 WATTS OF TOTAL LOAD

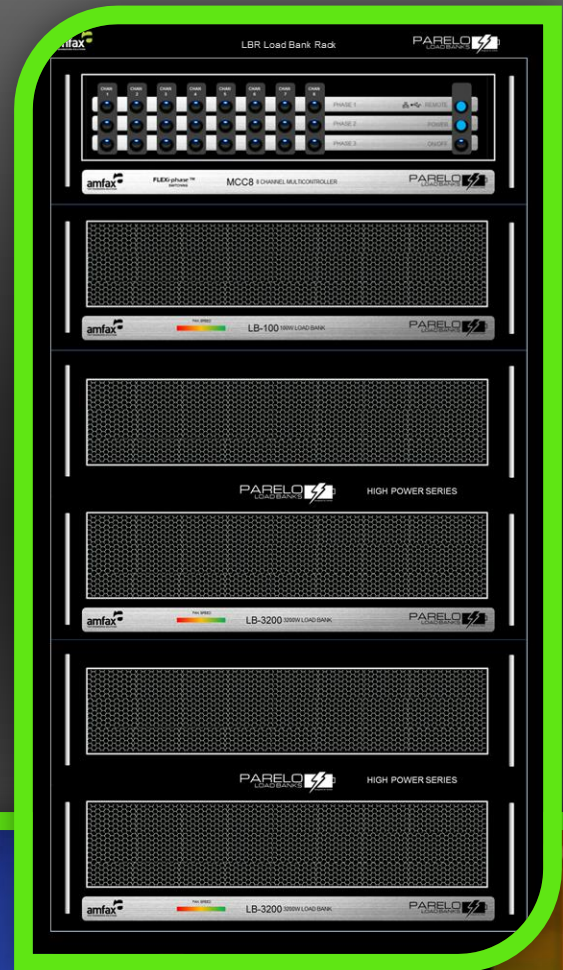

Amfax introduce the Parelo range of high quality and high performance load banks. Born out of our focus on providing exceptional test solutions to the aerospace sector, these load banks are reliable, rugged and designed to provide smooth, continuous resistive load at constant current.

Single and 8 channel **remote controller** modules

FLEXi-phase™ SWITCHING




Flexible switching of single or multiple phases per individual load bank channel



Load Bank Modules

Available 3u Load Banks

LB100	100 Watt Load Bank
LB200	200 Watt Load Bank
LB400	400 Watt Load Bank
LB800	800 Watt Load Bank
LB1000	1000 Watt Load Bank
LB1600	1600 Watt Load Bank

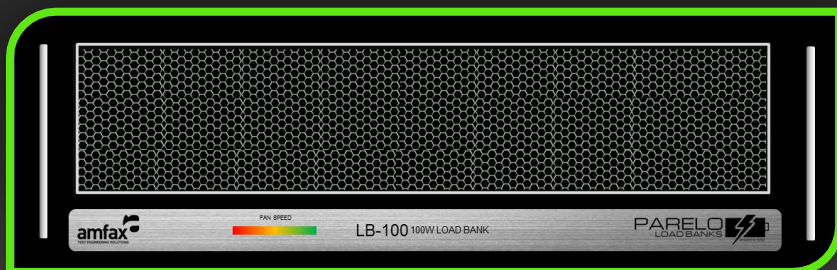

Real-time monitoring with easy to read colour coded LED display

Each load bank module has a built in over temperature protection circuit, this will remove power from the loads when the temperature inside the load bank reaches a defined temperature which is set below the maximum operating temperature of the load resistors

Available 6u Load Banks

LB3200 3200 Watt Load Bank



Cables

Interconnecting cables between Controller and Load Bank module are available in standard 1.2 and 2 Metre lengths (Other lengths available upon request)